



How to install the new catcher into the triangle bracket


1. Insert the parts 1 ( big long rod)into the triangle bracket. Please see the below picture.

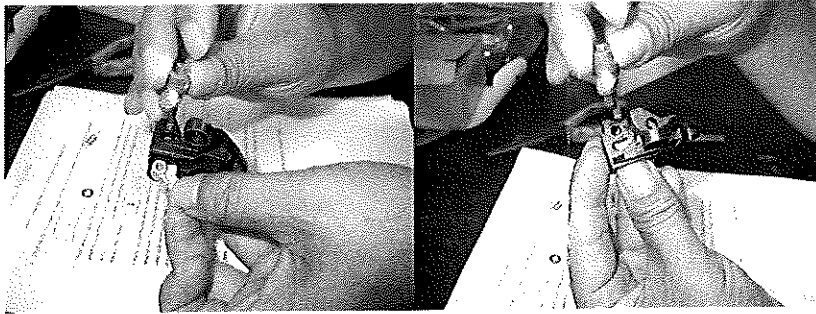

2. Secondly, put the small part 2 into the triangle bracket. Please make sure that you are installed the small part 2 in right position and direction. Please see the below picture.

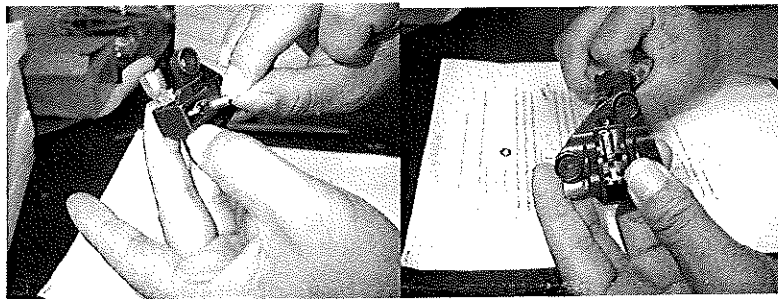


3. Please use small spring to hook the small part 2 with the triangle bracket. Please see below picture

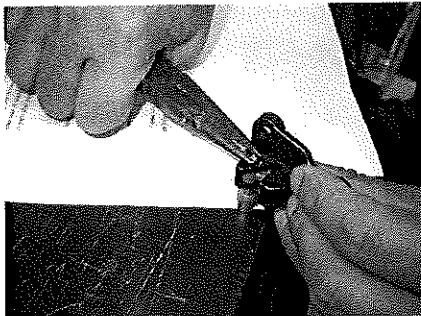


## How to change the Volvo 850 glove box repair kit

1. First of all, you need to take off the glove box inner cover by un-tight 6 screws.

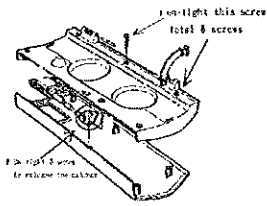

2. Once you un-tight the screw. The glove box cover has two pieces apart. The outer cover is tightening the lock catcher. Please see the below picture for the more detail. You need to un-tight 3 screws from the triangle bracket to replace the catcher.

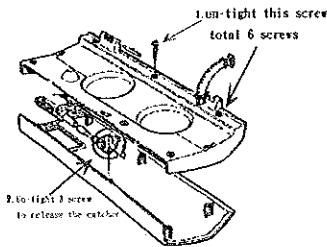

3. Please see the below step to show how to take the old catcher from the triangle bracket out. The picture one showing that you need to release the spring washer from other side of triangle bracket. The second picture showing that you have 2 pieces of parts after you release the old catcher from bracket. The third picture show that all the parts took out from the triangle bracket.

